

Specification

Product Code	0409	0406	0402	0401
Model No.	PF50	PF100	PF150	PF200
Description	Grinlites Orion 50Watt Flood Light	Grinlites Orion 100Watt Flood Light	Grinlites Orion 150Watt Flood Light	Grinlites Orion 200Watt Flood Light
Wattage (W)	50	100	150	200
Luminous Flux (lm)	5560	11110	16670	22230
Input Voltage (V)	240 VAC			
Colour	Cool White			
CCT (K)	5000-6500			
Beam Angle (Degree)	70 x 120			
LED Ambient Temperature	<70 °C			
Case Temperature	<60 °C			

Benefits and Features


- Energy saving up to 70%
- Reliable heat dissipation design provides low running temperature <60°C
- Long life span with a 60000 hour design life and a 3 year warranty (Return to supplier)
- State of the art design light structure to fit retrofit and new applications
- Adjustable mounting bracket fixture provides flexible installation options.
- IP67 Protection Rating

Application

- Outdoor Lighting
- Industrial Lighting
- Retail Lighting
- Feature Lighting
- Car Park Lighting

CE RoHS

 **GrinLites®**
An Australian Lighting
Company Since 2000

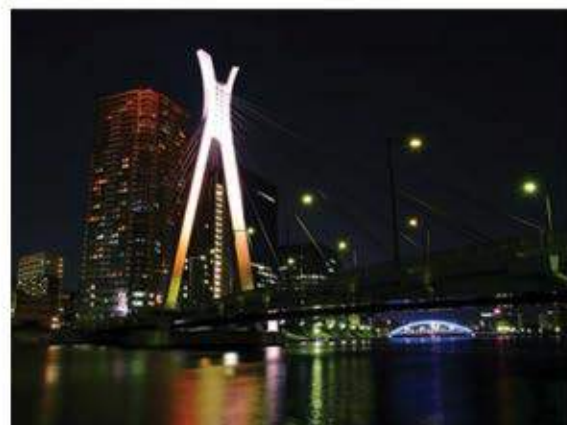

GrinLites LED Flood Light

AC Techart Electronics

4 Eton Court, Hallam, VIC 3803

PH 03 8759 0018 FAX 03 8774 2076 EMAIL: admin@actechart.com.au